


1 ZONA TELECOMANDO


DISEGNO TECNICO TECHNICAL DRAWING:



DIMMER

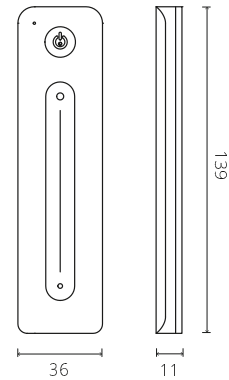

BIANCO DINAMICO



RGB / RGBW



CODE	Descrip.	Zone	Output Signal	RF Signal distance (open air)	IP	mm	Ricevitore abbinabile
G01107	Telec. Dimmer	1	RF (2.4GHz)	30m (senza barriere)	IP20	139x36x11	G01113
G01108	Telec. Bianco dinamico	1	RF (2.4GHz)	30m (senza barriere)	IP20	139x36x11	G01114
G01109	Telec. RGB - RGBW	1	RF (2.4GHz)	30m (senza barriere)	IP20	139x36x11	G01115

DESCRIZIONE / DESCRIPTION:

- Telecomando slim touch 1 zona
- Ogni telecomando può essere configurato con più ricevitori
- Fornito con supporto magnetico per fissaggio a parete

CERTIFICAZIONI / CERTIFICATIONS:

CE √RoHS EMC