


1-2-4 Canali CONTROLLER





DIMMER BIANCO DINAMICO



RGB / RGBW

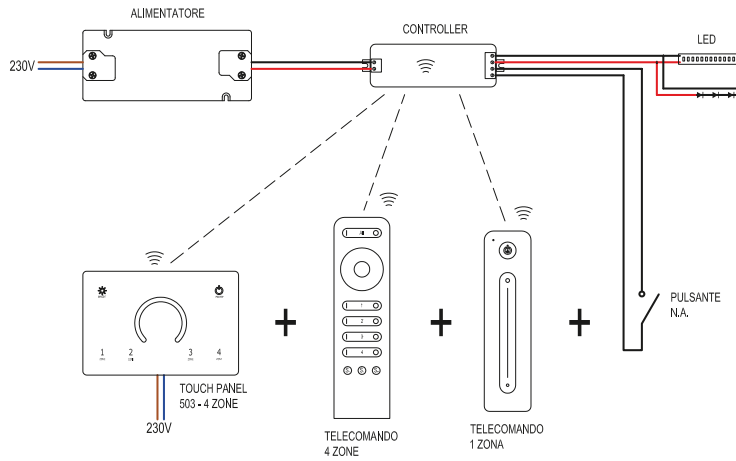

DISEGNO TECNICO TECHNICAL DRAWING:

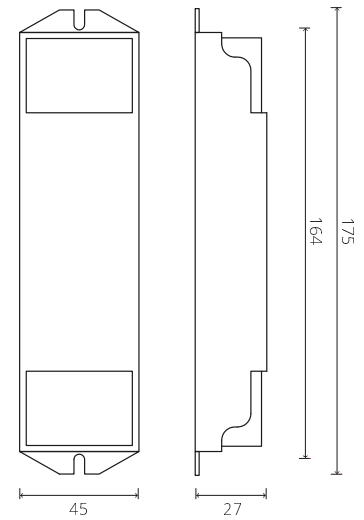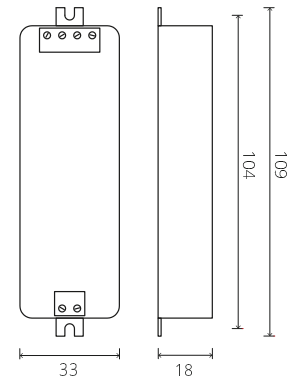

CODE	Descrip.	V input	Output power X channel	Output A X channel	IP	mm	Telecomando abbinabile
G01113	Dimmer Controller 1 canale	DC 5-36 V	40-288 W	8A x 1 CH	IP20	97x33xh18	G01110 - G01107 G01103 - G01104
G01114	Bianco dinamico Controller 2 canali	DC 12-24 V	120-240 W	5A x 2 CH	IP20	97x33xh18	G01111 - G01108 G01105 - G01106
G01115	RGB - RGBW Controller 4 canali	DC 12-36 V	4x60-180 W	5A x 4 CH	IP20	175x45xh27	G01112 - G01109 G01101 - G01102

DESCRIZIONE / DESCRIPTION:

- Ricevitore RF 2.4GHz, pulsante normalmente aperto, PWM
- Sincronizzabile contemporaneamente con telecomando 1 zona, telecomando 4 zone e 503
- Dimmerazione 0-100%
- Protetto contro: inversione di polarità, sovraccarico, surriscaldamento, corto circuito.

CERTIFICAZIONI / CERTIFICATIONS:

CE √RoHS EMC