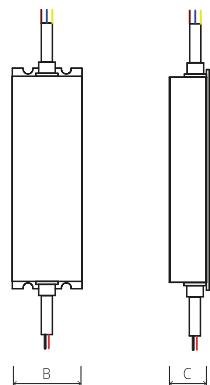


## ALIMENTATORI DIMMERABILI / DIMMABLE DRIVERS

**ALIM. DIMMERABILI (tensione costante) 0-10 - PWM - resistivo - DALI**

Watt	Vcc OUT	Vac IN	Hz	IP	Dimension (AxBxC)
75 W	12-24V	100-240V	50-60	IP65	180x63xh36
100 W	12-24V	100-240V	50-60	IP65	199x63xh36
150 W	12-24V	100-240V	50-60	IP65	219x63xh36
200 W	12-24V	100-240V	50-60	IP65	244x71xh38
240 W	12-24V	100-240V	50-60	IP65	244x71xh38

**DISEGNO TECNICO** TECHNICAL DRAWING:**ALIM. DIMMERABILI (tensione costante) - TRIAC**

Watt	Vcc OUT	Vac IN	Hz	IP	Dimension (AxBxC)
30 W	12-24V	230V	50	IP20	159x46xh19
50 W	12-24V	230V	50	IP20	177x58xh22
75 W	12-24V	230V	50	IP20	170x57xh31
100 W	12-24V	230V	50	IP20	201x63xh30

**ALIM. DIMMERABILI (tensione costante) - KONEX (con protocollo Konex integrato)**

Watt	Vcc OUT	Vac IN	Hz	IP	Dimension (AxBxC)
60 W	12-24V	100-240V	50-60	IP20	150x53xh35
120 W	12-24V	100-240V	50-60	IP20	191x63xh38

**DESCRIZIONE /** DESCRIPTION:

- Alimentatore con cavo di messa a terra

**CERTIFICAZIONI /** CERTIFICATIONS: