


SLIM 5 MM STRIP LED

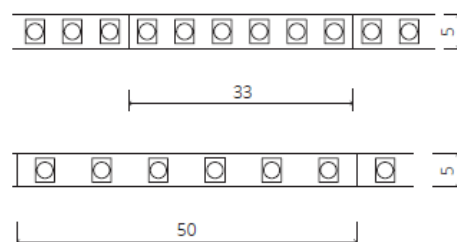

CODE	Watt/M	Temp.	Lumen	CRI	Led/m	V input	✂	mm	IP	
B01N104	14,4 W	2700°K	1026	90	180	24Vcc		33mm	5x2	IP20
B01N105	14,4 W	3000°K	1031	90	180	24Vcc		33mm	5x2	IP20
B01N106	14,4 W	4000°K	1100	90	180	24Vcc		33mm	5x2	IP20
B01N107	14,4 W	6000°K	1150	90	180	24Vcc		33mm	5x2	IP20
CODE	Watt/M	Temp.	Lumen	CRI	Led/m	V input	✂	mm	IP	
B01N100	9,6 W	2700°K	740	90	120	24Vcc		50mm	5x2	IP20
B01N101	9,6 W	3000°K	745	90	120	24Vcc		50mm	5x2	IP20
B01N102	9,6 W	4000°K	770	90	120	24Vcc		50mm	5x2	IP20
B01N103	9,6 W	6000°K	780	90	120	24Vcc		50mm	5x2	IP20

DISEGNO TECNICO TECHNICAL DRAWING:

SERVIZI DISPONIBILI SU RICHIESTA:
SERVICES ON DEMAND:

-  Spezzatura
Customized cutting lenght
-  Saldatura cavi
Soldering wires
-  Applicazione connettori
Connectors Applying
-  Controllo personalizzato
Customized checking
-  3 Step MacAdam

CERTIFICAZIONI / CERTIFICATIONS:

