


STRIP LATERALE STRIP LED



CODE	Watt/M	Temp.	Lumen	V input	✂	mm	IP
B01L033	9.6 W	3000°K	865	24Vcc	50mm	8x3	IP20
B01L034	9.6 W	4000°K	900	24Vcc	50mm	8x3	IP20
B01L035	9.6 W	6500°K	915	24Vcc	50mm	8x3	IP20
B01L036	9.6 W	3000°K	865	24Vcc	50mm	11-12x5	IP67
B01L037	9.6 W	4000°K	900	24Vcc	50mm	11-12x5	IP67
B01L038	9.6 W	6500°K	915	24Vcc	50mm	11-12x5	IP67

DISEGNO TECNICO TECHNICAL DRAWING:

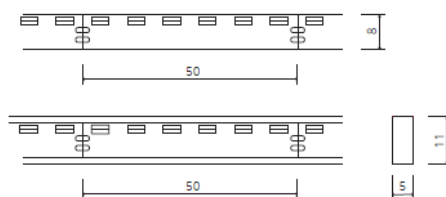

SERVIZI DISPONIBILI SU RICHIESTA:

SERVICES ON DEMAND:



Spezzatura
Customized cutting lenght



Saldatura cavi
Soldering wires



Applicazione connettori
Connectors Applying



Controllo personalizzato
Customized checking

CERTIFICAZIONI / CERTIFICATIONS:

CE cUL us III RoHS A+